Datacard® Photo Pointe™ Solutions

Using Photo Pointe solutions helps ensure crisp, life-like clarity for your full-color digital images.

Fast and easy image capture

Add speed and productivity to any photo ID process with Datacard® Photo Pointe™ solutions. Photo Pointe software — part of the Datacard® Capture Pointe™ Series software family — makes image capture easy. One click allows you to capture, crop and produce a high-quality digital image in less than seven seconds. No panning, tilting, zooming or other camera adjustments are required. Fully compatible with products from our software and hardware families, Photo Pointe™ solutions make a powerful addition to any integrated photo ID system from Datacard Group.

Choose the solution that meets your needs and fits your budget

- The standard Photo Pointe solution comes with Photo Pointe software, a 5.1 megapixel digital camera and image capture accessories.
- The Photo Pointe Pro solution includes Photo Pointe software, an 8.0 megapixel camera, image capture accessories and an optional high-powered external flash.

Datacard AUTHORIZED On-Site Service PROVIDER

DatacardGroup
SECURE ID AND CARD PERSONALIZATION SOLUTIONS

Datacard® Photo Pointe™ Solutions

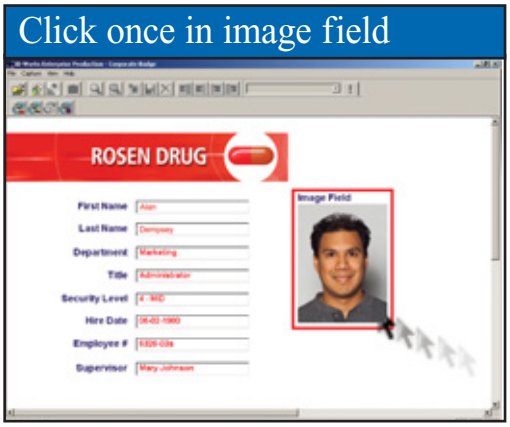

Using your pre-sets for capturing and cropping, Photo Pointe software can produce a high-quality digital image in less than seven seconds.

End-user definable software settings

Auto capture

Manual capture of live video

Auto crop image at a pre-defined ratio

Manual crop

White balance environment

Red-eye reduction

Photo Pointe solution components

Photo Pointe software with USB security key

5.1 megapixel digital camera

Standard USB cable

USB extension cable

AC power supply

AC power/USB adapter

Velcro® strap

Country-specific power cord

Tripod, backdrop, stand and frame

Installation instructions

Photo Pointe solution specifications

Camera dimensions: W 3.8 in. x H 2.5 in. x D 1.0 in. (96.0 mm x 63.0 mm x 26.0 mm), excluding protrusion

Weighs 4.6 oz./130g (camera body only)

Operates in temperatures from 32° to 104° F (0° to 40° C) with humidity levels of 30% to 90%

Internal memory

Flash range of 2 to 6 feet (0.6 to 1.8 meters) from camera

Agency approvals: CE Mark, FCC Class B, RoHS compliant

Photo Pointe Pro solution components

Photo Pointe software with USB security key

8.0 megapixel digital camera

Standard 4.0 ft. USB cable

USB extension cable

AC power adapter

Country-specific power cord

Tripod, backdrop, stand and frame

Installation instructions

Optional external flash (120V/240V) components include flash, bracket, synchro cord, hot shoe adapter and country-specific power cord

Photo Pointe Pro solution specifications

Camera dimensions: W 3.92 in. x H 2.56 in. x D 1.38 in. (99.5 mm x 65.0 mm x 35.0 mm)

Weighs 6.88 oz./195g (camera body only)

Operates in temperatures from 32° to 104° F (0° to 40° C) with humidity levels of 30% to 90%

Internal memory

Flash range of 2 to 6 feet (0.6 to 1.8 meters) from camera

Agency approvals: CE Mark, FCC Class B, RoHS compliant

Optional external flash specifications

Adjustable for full, half and quarter power

Three-second recycle time

50,000 flash lifespan (at full power)

Recommended distance of 6 to 15 feet (1.8 to 4.5 meters)

240v flash option not RoHS compliant

DatacardGroup

11111 Bren Road West
Minnetonka, MN 55343-9015
+1 952 933 1223
+1 952 931 0418 FAX
www.datacard.com

Datacard, Capture Pointe and Photo Pointe are registered trademarks, trademarks and/or service marks of DataCard Corporation in the United States and/or other countries. Velcro is a registered trademark of Velcro Industries B.V. Names and logos on sample cards are fictitious. Any similarity to actual names, trademarks or tradenames is coincidental. Specifications subject to change without notice.
©2005-2006 DataCard Corporation. All rights reserved.
DC6-7007